

PRODUCT FAMILY DATASHEET

Vintage 1906 LED

LED lamps, vintage edition



AREAS OF APPLICATION

- Domestic applications
- General illumination
- Outdoor use in outdoor luminaires only (minimum IP65)
- Perfect for decorative installations

PRODUCT BENEFITS

- Very low energy consumption
- Instant 100 % light, no warm-up time
- Can be easily fitted instead of ordinary light bulbs
- Lamps with innovative LED "filament" technology

PRODUCT FEATURES

- LED lamps for line voltage
- Mercury-free lamps
- Lifetime: up to 15,000 h
- Beam angle: up to 360°



TECHNICAL DATA

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	1.40 W	220...240 V			2500 K	0.70	Warm White	2500 K	120 lm
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	1.40 W	220...240 V			2500 K	0.70	Warm White	2500 K	120 lm
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	1.40 W	220...240 V			2500 K	0.70	Warm White	2500 K	120 lm
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	1.40 W	220...240 V			2500 K	0.70	Warm White	2500 K	120 lm
Vintage 1906 LED 13 1.4 W/2500 K E27 ¹⁾	1.40 W	220...240 V			2500 K	0.70	Warm White	2500 K	120 lm
1906 LED TUBE 20 CL 2.8 W/2400 K E27 ¹⁾	2.80 W	220...240 V			2400 K	0.70	Warm White	2400 K	200 lm
RF1906 GLOBE 22 2.5 W/2500 K E27 ¹⁾	2.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	225 lm
Vintage 1906 LED 22 2.5 W/2500 K E27 ¹⁾	2.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	220 lm
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	2.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	220 lm
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	2.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	220 lm
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	2.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	220 lm
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	2.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	220 lm
RF1906 GLOBE 25 CL 5 W/2000 K E27 ¹⁾	5.00 W	220...240 V	18	29	2000 K	0.70	Warm White	2000 K	250 lm
Vintage 1906 LED 28 5 W/2000 K E27 ¹⁾	5.00 W	220...240 V	18	29	2000 K	0.70	Warm White	2000 K	300 lm
RF1906 GLOBE 28 5 W/2000 K E27 ¹⁾	5.00 W	220...240 V	18	29	2000 K	0.70	Warm White	2000 K	300 lm
1906 LED TUBE 35 CL 4 W/2400 K E27 ¹⁾	4.00 W	220...240 V			2400 K	0.70	Warm White	2400 K	400 lm

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux
1906 LED TUBE 35 CL 4.5 W/2400 K E27 DIM ¹⁾	4.50 W	220...240 V			2400 K	0.70	Warm White	2400 K	400 lm
RF1906 GLOBE 36 CL 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	420 lm
Vintage 1906 LED 36 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	420 lm
Vintage 1906 LED 36 4.5 W/2500 K E14 ¹⁾	4.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	420 lm
Vintage 1906 LED 36 4.5 W/2500 K E14 ¹⁾	4.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	420 lm
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V	25	40	2500 K	0.70	Warm White	2500 K	470 lm
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V	25	40	2500 K	0.70	Warm White	2500 K	470 lm
Vintage 1906 LED 40 CL 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V	25	40	2500 K	0.70	Warm White	2500 K	420 lm
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V	18	29	2500 K	0.70	Warm White	2500 K	470 lm
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V	25	40	2500 K	0.70	Warm White	2500 K	470 lm
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V	25	40	2500 K	0.70	Warm White	2500 K	470 lm
RF1906 GLOBE 52 CL 7 W/2700 K E27 ¹⁾	7.00 W	220...240 V	32	50	2700 K	0.70	Warm White	2700 K	680 lm
RF1906 GLOBE 54 CL 7 W/2400 K E27 ¹⁾	7.00 W	220...240 V			2400 K	0.70	Warm White	2400 K	710 lm
RF1906 GLOBE 55 7 W/2500 K E27 ¹⁾	7.00 W	220...240 V			2500 K	0.70	Warm White	2500 K	725 lm
Vintage 1906 LED 55 7 W/2500 K E27 ¹⁾	7.00 W	220...240 V			2500 K	0.70	Warm White	2500 K	725 lm
SST GLOBE 55 DIM 7.5 W/2500 K E27 ¹⁾	7.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	725 lm
Vintage 1906 LED 68 8 W/2500 K E27 ¹⁾	8.00 W	220...240 V			2500 K	0.70	Warm White	2500 K	950 lm

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux
RF1906 CLAS ST 22 2.5 W/2500 K E27 ¹⁾	2.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	225 lm
RF1906 CLAS ST 25 5 W/2000 K E27 ¹⁾	5.00 W	220...240 V	18	29	2000 K	0.70	Warm White	2000 K	250 lm
RF1906 CLAS ST 36 CL 4.5 W/2500 K E27 ¹⁾	4.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	420 lm
RF1906 CLAS ST 55 7.5 W/2500 K E27 ¹⁾	7.50 W	220...240 V			2500 K	0.70	Warm White	2500 K	725 lm

Product description	Color rendering index Ra	Light technical data		Dimensions & weight	Lifespan		Additional product data		Capabilities
		Warm-up time (60 %)	Starting time	Overall length	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	100.0 mm	15000 h	100000	E14	Yes	No
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	125.0 mm	15000 h	100000	E14	Yes	No
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	100.0 mm	15000 h	100000	E14	Yes	No
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	78.0 mm	15000 h	100000	E14	Yes	No
Vintage 1906 LED 13 1.4 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	105.0 mm	15000 h	100000	E27	Yes	No
1906 LED TUBE 20 CL 2.8 W/2400 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	138.0 mm	15000 h	100000	E27	Yes	No
RF1906 GLOBE 22 2.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	178.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 22 2.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	105.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	125.0 mm	15000 h	100000	E14	Yes	No
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	100.0 mm	15000 h	100000	E14	Yes	No

Product description	Color rendering index Ra	Light technical data		Dimensions & weight	Lifespan		Additional product data		Capabilities
		Warm-up time (60 %)	Starting time	Overall length	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	100.0 mm	15000 h	100000	E14	Yes	No
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	77.0 mm	15000 h	100000	E14	Yes	No
RF1906 GLOBE 25 CL 5 W/2000 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	178.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 28 5 W/2000 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	290.0 mm	15000 h	100000	E27	Yes	No
RF1906 GLOBE 28 5 W/2000 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	283.0 mm	15000 h	100000	E27	Yes	No
1906 LED TUBE 35 CL 4 W/2400 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	204.0 mm	15000 h	100000	E27	Yes	No
1906 LED TUBE 35 CL 4.5 W/2400 K E27 DIM ¹⁾	≥80	< 0.50 s	< 0.5 s	204.0 mm	15000 h	100000	E27	Yes	Yes
RF1906 GLOBE 36 CL 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	178.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 36 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	105.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 36 4.5 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	97.0 mm	15000 h	100000	E14	Yes	No
Vintage 1906 LED 36 4.5 W/2500 K E14 ¹⁾	≥80	< 0.50 s	< 0.5 s	78.0 mm	15000 h	100000	E14	Yes	No
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	156.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	165.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 40 CL 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	140.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	168.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	165.0 mm	15000 h	100000	E27	Yes	No





Product description	Color rendering index Ra	Light technical data		Dimensions & weight	Lifespan		Additional product data		Capabilities
		Warm-up time (60 %)	Starting time	Overall length	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	122.0 mm	15000 h	100000	E27	Yes	No
RF1906 GLOBE 52 CL 7 W/2700 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	178.0 mm	15000 h	100000	E27	Yes	No
RF1906 GLOBE 54 CL 7 W/2400 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	168.0 mm	15000 h	100000	E27	Yes	Yes
RF1906 GLOBE 55 7 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	178.0 mm	15000 h	100000	E27	Yes	No
Vintage 1906 LED 55 7 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	105.0 mm	15000 h	100000	E27	Yes	No
SST GLOBE 55 DIM 7.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	178.0 mm	15000 h	100000	E27	Yes	Yes
Vintage 1906 LED 68 8 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	105.0 mm	15000 h	100000	E27	Yes	No
RF1906 CLAS ST 22 2.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	140.0 mm	15000 h	100000	E27	Yes	No
RF1906 CLAS ST 25 5 W/2000 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	140.0 mm	15000 h	100000	E27	Yes	No
RF1906 CLAS ST 36 CL 4.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	140.0 mm	15000 h	100000	E27	Yes	No
RF1906 CLAS ST 55 7.5 W/2500 K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	140.0 mm	15000 h	100000	E27	Yes	Yes

Product description	Certificates & standards		Country-specific categorizations
	Energy efficiency class	Energy consumption	ILCOS
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	A++	2 kWh/1000h	
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	A++	2 kWh/1000h	
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	A++	2 kWh/1000h	
Vintage 1906 LED 12 1.4 W/2500 K E14 ¹⁾	A++	2 kWh/1000h	

Product description	Certificates & standards		Country-specific categorizations
	Energy efficiency class	Energy consumption	ILCOS
Vintage 1906 LED 13 1.4 W/2500 K E27 ¹⁾	A++	2 kWh/1000h	
1906 LED TUBE 20 CL 2.8 W/2400 K E27 ¹⁾	A+	3 kWh/1000h	
RF1906 GLOBE 22 2.5 W/2500 K E27 ¹⁾	A+	3 kWh/1000h	DRAG/C-2,8/827-220/240-E27-125
Vintage 1906 LED 22 2.5 W/2500 K E27 ¹⁾	A+	3 kWh/1000h	
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	A+	3 kWh/1000h	
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	A+	3 kWh/1000h	
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	A+	3 kWh/1000h	
Vintage 1906 LED 22 2.5 W/2500 K E14 ¹⁾	A+	3 kWh/1000h	
RF1906 GLOBE 25 CL 5 W/2000 K E27 ¹⁾	A	5 kWh/1000h	
Vintage 1906 LED 28 5 W/2000 K E27 ¹⁾	A	5 kWh/1000h	
RF1906 GLOBE 28 5 W/2000 K E27 ¹⁾	A	5 kWh/1000h	
1906 LED TUBE 35 CL 4 W/2400 K E27 ¹⁾	A++	4 kWh/1000h	
1906 LED TUBE 35 CL 4.5 W/2400 K E27 DIM ¹⁾	A+	5 kWh/1000h	
RF1906 GLOBE 36 CL 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	DRAG/C-4/824-220/240-E27-124
Vintage 1906 LED 36 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	
Vintage 1906 LED 36 4.5 W/2500 K E14 ¹⁾	A+	5 kWh/1000h	
Vintage 1906 LED 36 4.5 W/2500 K E14 ¹⁾	A+	5 kWh/1000h	

Product description	Certificates & standards		Country-specific categorizations
	Energy efficiency class	Energy consumption	ILCOS
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	
Vintage 1906 LED 40 CL 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	
Vintage 1906 LED 40 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	
RF1906 GLOBE 52 CL 7 W/2700 K E27 ¹⁾	A+	7 kWh/1000h	
RF1906 GLOBE 54 CL 7 W/2400 K E27 ¹⁾	A+	7 kWh/1000h	DRAG/C-7/827-220-240-E27-124
RF1906 GLOBE 55 7 W/2500 K E27 ¹⁾	A+	7 kWh/1000h	DRAG/C-7/827-220/240-E27-125
Vintage 1906 LED 55 7 W/2500 K E27 ¹⁾	A+	7 kWh/1000h	
SST GLOBE 55 DIM 7.5 W/2500 K E27 ¹⁾	A+	8 kWh/1000h	DRAG/C-6,5/827-220/240-E27-125
Vintage 1906 LED 68 8 W/2500 K E27 ¹⁾	A++	8 kWh/1000h	
RF1906 CLAS ST 22 2.5 W/2500 K E27 ¹⁾	A++	3 kWh/1000h	DRAS/C-2,8/824-220-240-E27-64
RF1906 CLAS ST 25 5 W/2000 K E27 ¹⁾	A	5 kWh/1000h	
RF1906 CLAS ST 36 CL 4.5 W/2500 K E27 ¹⁾	A+	5 kWh/1000h	DRAS/C-4/824-220/240-E27-64
RF1906 CLAS ST 55 7.5 W/2500 K E27 ¹⁾	A+	8 kWh/1000h	DRAS/C-7/824-220-240-E27-64

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

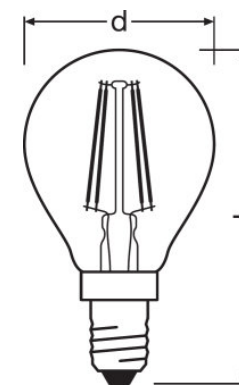
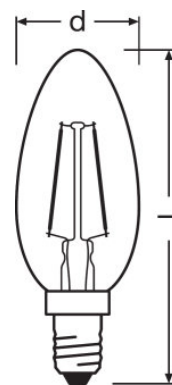

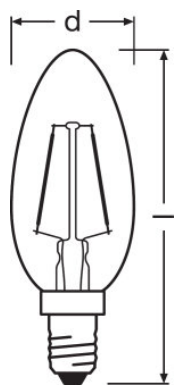


Vintage 1906 LED 12 1.4 W/2500 K E14,
Vintage 1906 LED 22 2.5 W/2500 K E14

Vintage 1906 LED 12 1.4 W/2500 K E14,
Vintage 1906 LED 22 2.5 W/2500 K E14

Vintage 1906 LED 12 1.4 W/2500 K E14,
Vintage 1906 LED 22 2.5 W/2500 K E14

Vintage 1906 LED 12 1.4 W/2500 K E14,
Vintage 1906 LED 22 2.5 W/2500 K E14

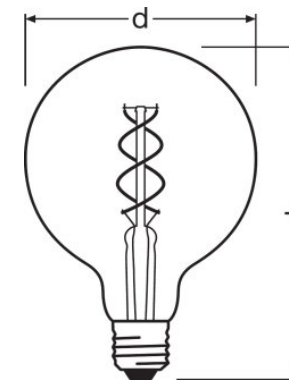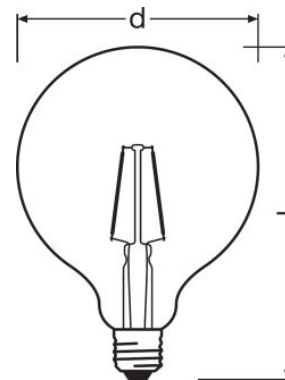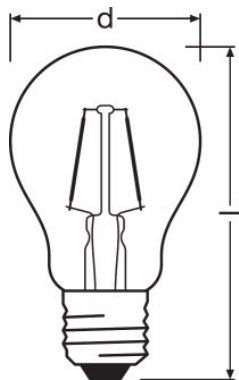


Vintage 1906 LED 13 1.4 W/2500 K E27,
Vintage 1906 LED 22 2.5 W/2500 K E27


1906 LED TUBE 20 CL 2.8 W/2400 K
E27

RF1906 GLOBE 22 2.5 W/2500 K E27


RF1906 GLOBE 25 CL 5 W/2000 K E27

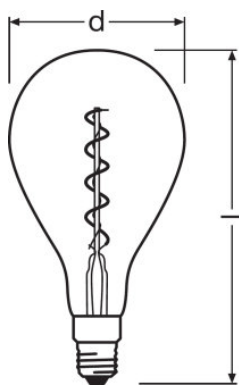


Vintage 1906 LED 28 5 W/2000 K E27

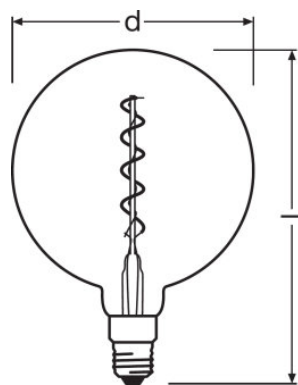





RF1906 GLOBE 28 5 W/2000 K E27



1906 LED TUBE 35 CL 4 W/2400 K E27,
1906 LED TUBE 35 CL 4.5 W/2400 K
E27 DIM

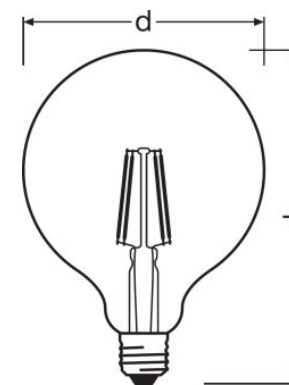

RF1906 GLOBE 36 CL 4.5 W/2500 K
E27, RF1906 GLOBE 55 7 W/2500 K
E27, SST GLOBE 55 DIM 7.5 W/2500 K
E27

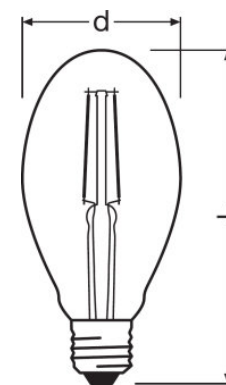
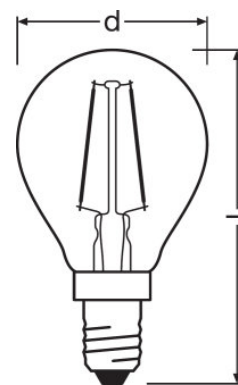
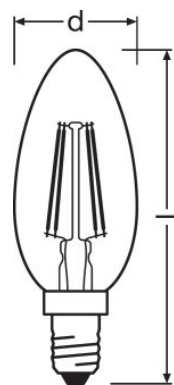
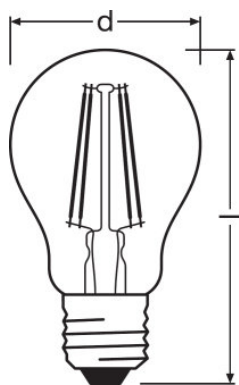


Vintage 1906 LED 36 4.5 W/2500 K E27,
Vintage 1906 LED 55 7 W/2500 K E27,
Vintage 1906 LED 68 8 W/2500 K E27

Vintage 1906 LED 36 4.5 W/2500 K E14

Vintage 1906 LED 36 4.5 W/2500 K E14

Vintage 1906 LED 40 4.5 W/2500 K E27

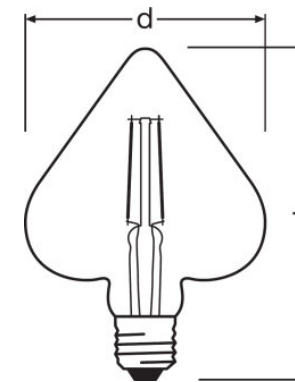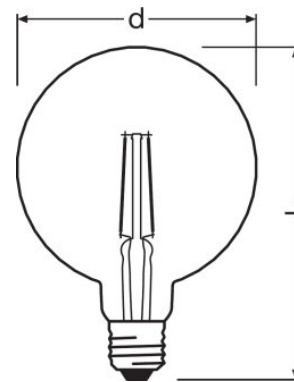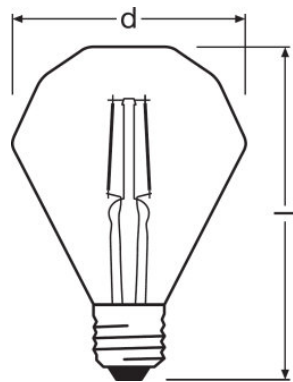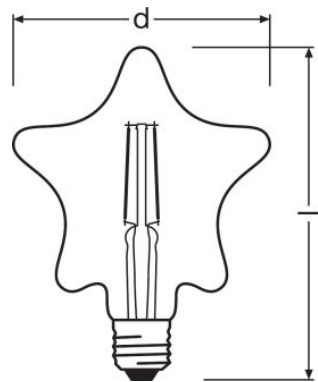


Vintage 1906 LED 40 4.5 W/2500 K E27


Vintage 1906 LED 40 CL 4.5 W/2500 K
E27

Vintage 1906 LED 40 4.5 W/2500 K E27


Vintage 1906 LED 40 4.5 W/2500 K E27

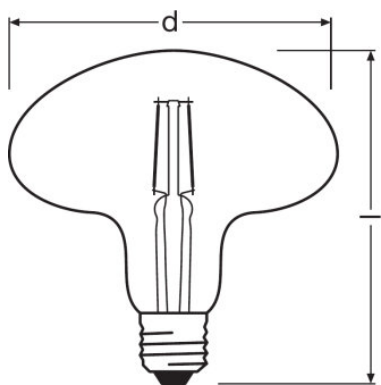


Vintage 1906 LED 40 4.5 W/2500 K E27

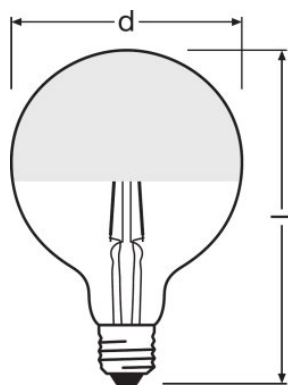


RF1906 GLOBE 52 CL 7 W/2700 K E27

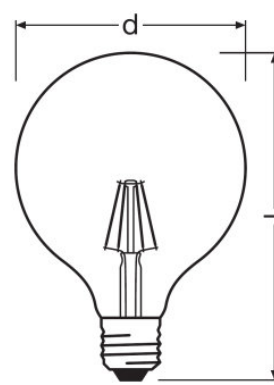


RF1906 GLOBE 54 CL 7 W/2400 K E27

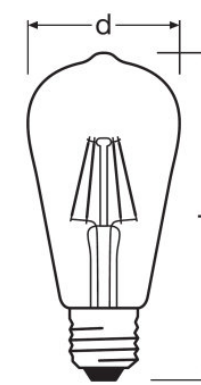

RF1906 CLAS ST 22 2.5 W/2500 K E27,
RF1906 CLAS ST 55 7.5 W/2500 K E27

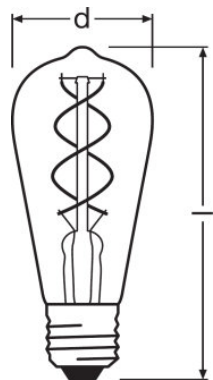

RF1906 CLAS ST 25 5 W/2000 K E27

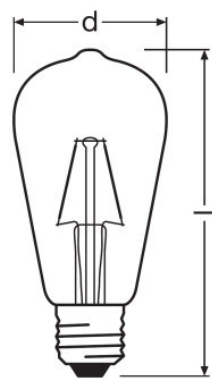

RF1906 CLAS ST 36 CL 4.5 W/2500 K
E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075119345	Vintage 1906 LED 12 1.4 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	330.00 g
4058075119420	Vintage 1906 LED 12 1.4 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	330.00 g
4058075119482	Vintage 1906 LED 12 1.4 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	330.00 g
4058075119543	Vintage 1906 LED 12 1.4 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	462.00 g
4058075119147	Vintage 1906 LED 13 1.4 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	394.00 g
4058075808171	1906 LED TUBE 20 CL 2.8 W/2400 K E27	Shipping carton box 4	185 mm x 185 mm x 206 mm	7.05 dm ³	528.00 g
4058075808980	RF1906 GLOBE 22 2.5 W/2500 K E27	Shipping carton box 4	291 mm x 291 mm x 251 mm	21.25 dm ³	1105.00 g
4058075119185	Vintage 1906 LED 22 2.5 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	394.00 g
4058075119444	Vintage 1906 LED 22 2.5 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	330.00 g
4058075119505	Vintage 1906 LED 22 2.5 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	330.00 g
4058075119369	Vintage 1906 LED 22 2.5 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	330.00 g
4058075119567	Vintage 1906 LED 22 2.5 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	462.00 g
4058075092136	RF1906 GLOBE 25 CL 5 W/2000 K E27	Shipping carton box 4	291 mm x 291 mm x 251 mm	21.25 dm ³	1092.00 g
4058075091993	Vintage 1906 LED 28 5 W/2000 K E27	Shipping carton box 4	394 mm x 394 mm x 388 mm	60.23 dm ³	2375.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075092013	RF1906 GLOBE 28 5 W/2000 K E27	Shipping carton box 4	474 mm x 474 mm x 388 mm	87.17 dm ³	3075.00 g
4058075808188	1906 LED TUBE 35 CL 4 W/2400 K E27	Shipping carton box 4	185 mm x 185 mm x 262 mm	8.97 dm ³	635.00 g
4058075114449	1906 LED TUBE 35 CL 4.5 W/2400 K E27 DIM	Shipping carton box 4	185 mm x 185 mm x 262 mm	8.97 dm ³	521.00 g
4052899962071	RF1906 GLOBE 36 CL 4.5 W/2500 K E27	Shipping carton box 4	291 mm x 291 mm x 251 mm	21.25 dm ³	1081.00 g
4058075119246	Vintage 1906 LED 36 4.5 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	394.00 g
4058075119383	Vintage 1906 LED 36 4.5 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	330.00 g
4058075119581	Vintage 1906 LED 36 4.5 W/2500 K E14	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	462.00 g
4058075091979	Vintage 1906 LED 40 4.5 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 206 mm	7.05 dm ³	584.00 g
4058075092075	Vintage 1906 LED 40 4.5 W/2500 K E27	Shipping carton box 4	233 mm x 233 mm x 223 mm	12.11 dm ³	842.00 g
4058075091955	Vintage 1906 LED 40 CL 4.5 W/2500 K E27	Shipping carton box 4	233 mm x 233 mm x 191 mm	10.37 dm ³	796.00 g
4058075092037	Vintage 1906 LED 40 4.5 W/2500 K E27	Shipping carton box 4	291 mm x 291 mm x 251 mm	21.25 dm ³	1152.00 g
4058075092099	Vintage 1906 LED 40 4.5 W/2500 K E27	Shipping carton box 4	233 mm x 233 mm x 223 mm	12.11 dm ³	902.00 g
4058075092051	Vintage 1906 LED 40 4.5 W/2500 K E27	Shipping carton box 4	291 mm x 291 mm x 183 mm	15.50 dm ³	1006.00 g
4058075091931	RF1906 GLOBE 52 CL 7 W/2700 K E27	Shipping carton box 4	291 mm x 291 mm x 251 mm	21.25 dm ³	1112.00 g
4052899972698	RF1906 GLOBE 54 CL 7 W/2400 K E27	Shipping carton box 4	291 mm x 291 mm x 228 mm	19.31 dm ³	1082.00 g
4058075809406	RF1906 GLOBE 55 7 W/2500 K E27	Shipping carton box 4	291 mm x 291 mm x 251 mm	21.25 dm ³	1117.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075119260	Vintage 1906 LED 55 7 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	394.00 g
4058075808997	SST GLOBE 55 DIM 7.5 W/2500 K E27	Shipping carton box 4	291 mm x 291 mm x 251 mm	21.25 dm ³	1102.00 g
4058075119307	Vintage 1906 LED 68 8 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 182 mm	6.23 dm ³	394.00 g
4058075808706	RF1906 CLAS ST 22 2.5 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 206 mm	7.05 dm ³	651.00 g
4058075092112	RF1906 CLAS ST 25 5 W/2000 K E27	Shipping carton box 4	185 mm x 185 mm x 206 mm	7.05 dm ³	492.00 g
4052899962095	RF1906 CLAS ST 36 CL 4.5 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 206 mm	7.05 dm ³	650.00 g
4052899972360	RF1906 CLAS ST 55 7.5 W/2500 K E27	Shipping carton box 4	185 mm x 185 mm x 206 mm	7.05 dm ³	667.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.