


INTER-PLUS Profile

Ref. A18078

NEW

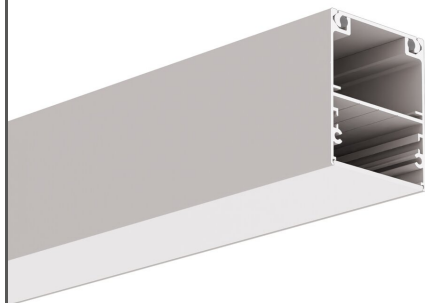

IP20



- A profile designed for building complete ceiling or wall-mounted luminaires with space for a power supply and other electronic components
- Compatible with current modules
- Tool-free installation of the profile on an aluminum strip facilitates luminaire servicing

APPLICATION

- main and functional lighting


MOUNTING

- to the surface, using a dedicated mounting track and properly selected screws

ADDITIONAL INFORMATION

- the power supply can be secured inside the profile using dedicated accessories
- profiles and covers are available in lengths: 2005mm, 2400mm, and 3010mm (tolerance +5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

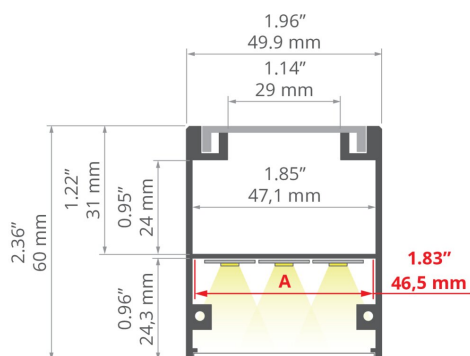

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear, rectangular, polygonal
Profile cross-section	rectangular
Width	49.9 mm
Height	60 mm
Maximum length on request	3.01 mm
LED gluing width A	46.5 mm
Number of LED strips A (8 mm wide)	5
Width of the glow	46.5 mm
Dedicated space for power supply	yes
Possibility of obtaining a line of light	yes
Building type	Commercial, HoReCa object
Facility zone	office, communication routes and corridors
The cover is cut to the length of the profile	yes


Color	Length	Ref
 silver anodized	2005 mm	A18078A_2
	2405 mm	A18078A_2.4
	3010 mm	A18078A_3
 white lacquered mat	2005 mm	A18078L10_2
	2405 mm	A18078L10_2.4
	3010 mm	A18078L10_3
 black anodized	2005 mm	A18078A07_2
	2405 mm	A18078A07_2.4
	3010 mm	A18078A07_3

INTER-PLUS Profile

Ref. A18078

Can be easily connected into runs	yes
Main lighting	yes

SAMPLE PROJECTS

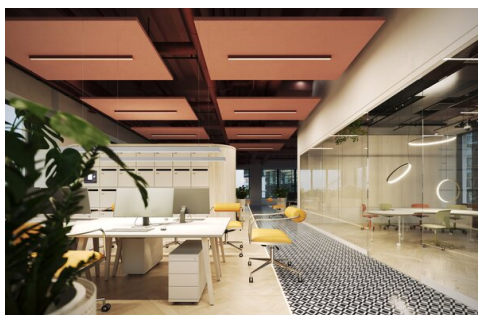


RELATED ACCESSORIES > COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
HSP-47 Cover		PC	80 %	frosted	B17181F
			82 %	microprism	B17181M


RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap INTER-PLUS		ABS	 black	C24570C07
			 gray	C24570C02
			 white	C24570L10


RELATED ACCESSORIES > RELATED LED > CRI 95+




K-CR-0480-24
K-CR-0480-24




K-CR-0960-24
K-CR-0960-24



K-CR-1440-24
K-CR-1440-24



KWP-CR-0480-24
KWP-CR-0480-24



KWP-CR-0960-24
KWP-CR-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY



K-VHE-0480-24
K-VHE-0480-24



K-VHE-0960-24
K-VHE-0960-24



K-VHE-1440-24
K-VHE-1440-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO



K-0480-24
K-0480-24




K-0960-24
K-0960-24




K-1440-24
K-1440-24




KWP-1440-24
KWP-1440-24




KWP-0480-24
KWP-0480-24



KWP-0960-24
KWP-0960-24



K-2400-24
K-2400-24




K2-1920-24
K2-1920-24



K3-2880-24
K3-2880-24




K-HD-0480-24
K-HD-0480-24



K-HD-0960-24
K-HD-0960-24



K-HD-1440-24
K-HD-1440-24



K-2300-24
K-2300-24

RELATED ACCESSORIES > ELECTRONICS > POWER SUPPLIES



KGP LV30W24CG 24V
E60503-030B-24



KGP LV60W24CG 24V
E60507-060B-24



KGP LV100W24CG 24V
E60511-100B-24



KGP LV150W24CG 24V
E60515-150B-24



KGP LV30W24CG DALI 24V
E60504-030D-24



KGP LV60W24CG DALI 24V
E60508-060D-24



KGP LV100W24CG DALI 24V
E60512-100D-24



KGP LV150W24CG DALI 24V
E60516-150D-24



KGP LV30W24 30W 24V
E60523-030B-24



KGP LV60W24 60W 24V
E60526-060B-24